


CAT.6 UTP FIELD TERMINATION PLUG

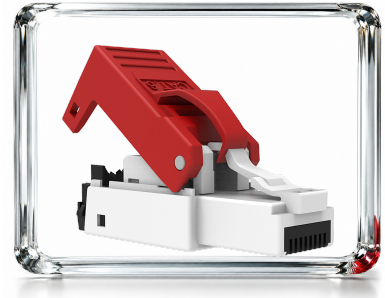

BRIEF

The CAT6 unshielded field termination plug enables stable and reliable network connections with its press-fit assembly process.

FEATURES

Press-fit assembly process ensures system reliability and stability.

T568A & T568B wiring.

Complied with the Cat.6 patch cord component level.

Easy, quick and reliable installation.

ORDERING INFORMATION

PRODUCT REFERENCE	DESCRIPTION
SW122 2241	CAT.6 UTP Field Termination Plug

CAT.6 UTP Field Termination Plug.

Manufactured by Elsewedy Telecom Cables A.R.E., 10th of Ramadan City, Industrial Zone (A3), Egypt.

FIELD TERMINATION PLUG · FEILD TERMINATION PLUG · CAT6 MPTL

SPECIFICATIONS

Category	Cato	Cable structure	UTP, Diameter 4.4~6.8mm
Shielding	Unshielded UTP	Cable conductor	Suitable for 23~26AWG stranded and solid wire
Operating temperature	-10°C to 60°C	RJ45 Housing	PC UL 94-V2, with black color
IDC re- installing cycles	> 20 cycles	RJ45 Contact finish	ABS, UL94V-050 micro-inch gold plated on plug contact
Life mating	> 750 cycles	Extractor	PC UL 94-V2, red color



STANDARD COMPLIANCE

ANSI/TIA-568.2-D	ISO/IEC 11801-1, Class D/E
IEC 60603-7	IEC 60512-99-002
IEEE 802.3bt Type 4 PoE++ (4PPoE) IOOW	ANSI/TIA-1096-A (FCC Part 68)
UL1863	RoHS/ REACH



FIELD TERMINATION PLUG · FEILD TERMINATION PLUG · CAT6 MPTL

TECHNICAL DRAWING

Unit of length: mm

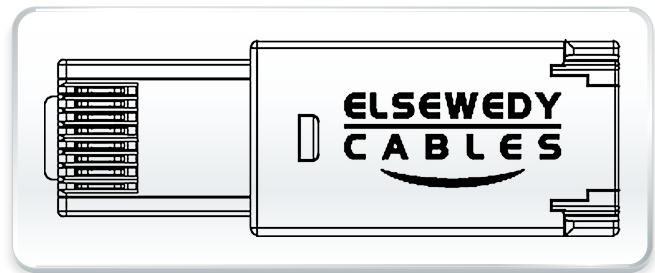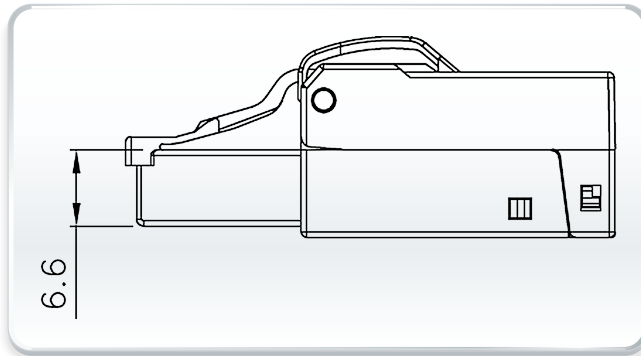

TECHNICAL DRAWING

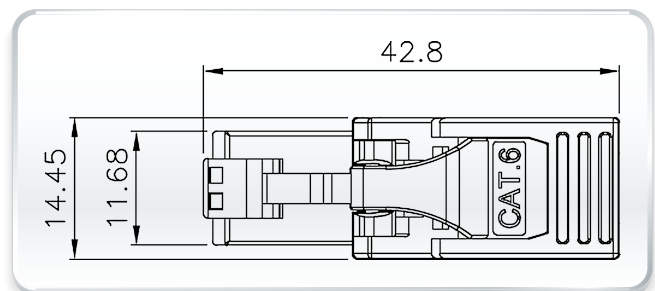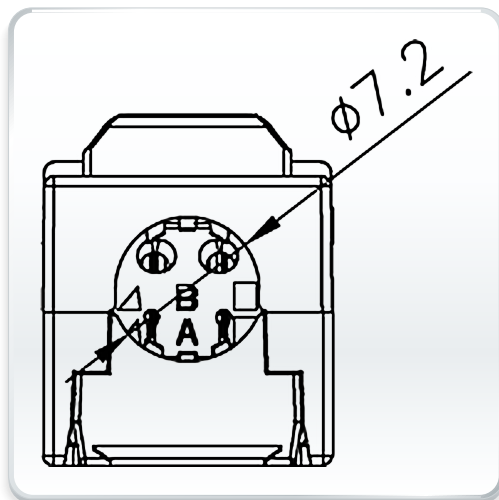

DESIGN

