

CAT.6A UTP FIELD TERMINATION PLUG



BRIEF

CAT.6A UTP Field Termination Plug.

FEATURES

Press-fit assembly process ensures system reliability and stability.

T568A & T568B wiring.

Complied with the Cat.6 patch cord component level.

Easy, quick and reliable installation.

SPECIFICATIONS

Operating temperature	-10°C to 60°C	Cable conductor	Suitable for 23~26AWG stranded and solid wire
IDC re-installing cycles	≥ 20 cycles	RJ45 Housing	PC UL 94-V2, with black color
Life mating	≥ 750 cycles	RJ45 Contact finish	ABS, UL94V-050 micro-inch gold plated on plug contact
Cable structure	UTP, Diameter 4.4~6.8mm	Extractor	PC UL 94-V2, red color

FIELD TERMINATION PLUG · FEILD TERMINATION PLUG · CAT6A MPTL

STANDARD COMPLIANCE



ANSI/TIA-568.2-D	ISO/IEC 11801-1, Class D/E
IEC 60603-7	IEC 60512-99-002
IEEE 802.3bt Type 4 PoE++ (4PPoE) 100W	ANSI/TIA-1096-A (FCC Part 68)
UL1863	RoHS/ REACH
IEC 60603- 7	IEC 60512-99- 002

SPECIFICATIONS · SOURCE NOTES

Operating temperature | IDC re-installing cycles | -10°C to 60°C | ≥ 20 cycles
 Life mating | Cable structure | ≥ 750 cycles | UTP, Diameter 4.4~6.8mm
 Cable conductor | RJ45 Housing | Suitable for 23~26AWG stranded and solid wire | PC UL 94-V2, with black color
 RJ45 Contact finish | Extractor | ABS, UL94V-050 micro-inch gold plated on plug contact | PC UL 94-V2, red color
 PCB | FR4, UL 94-V0


TECHNICAL DRAWING

Unit of length: mm

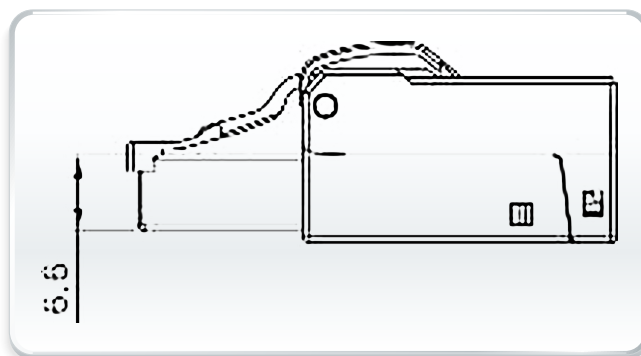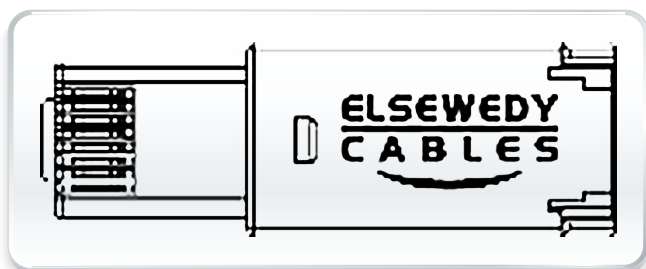

FIELD TERMINATION PLUG · FEILD TERMINATION PLUG · CAT6A MPTL

TECHNICAL DRAWING

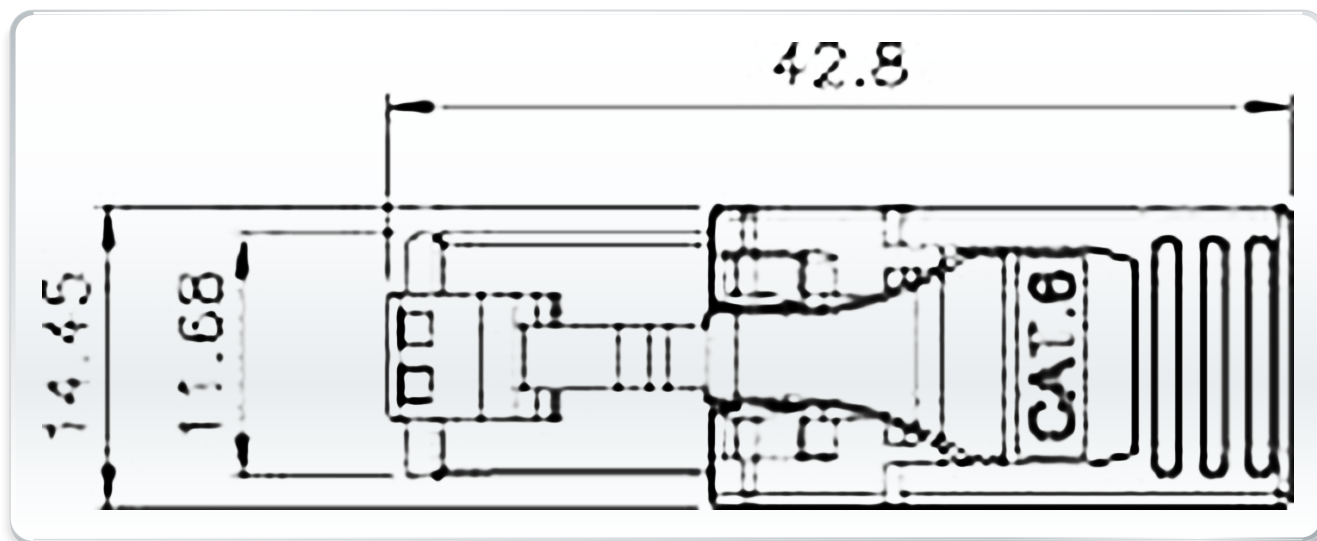

ORDERING INFORMATION

PRODUCT REFERENCE	DESCRIPTION
SW122 3241	CAT.6A UTP Field Termination Plug

CAT.6A UTP Field Termination Plug.

Manufactured by Elsewedy Telecom Cables A.R.E., 10th of Ramadan City, Industrial Zone (A3), Egypt.