


CAT.8 STP FIELD TERMINATION PLUG

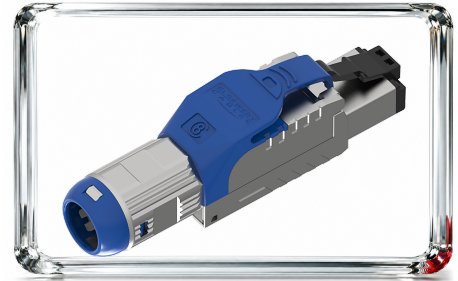

BRIEF

The CAT8 Shielded Field Termination Plug with Blue Latch enables quick and reliable network installations without the need for tools, suitable for setting up shielded high-speed networks.

FEATURES

Tool-free structure support an easy, quick, and reliable installation

Complied with the Cat.6A patch cord component level

Support MPTL Link up to 90 meters

T568A & T568B Wiring

RJ45 Contact is 50 micro-inch gold plated on plug contact area

ORDERING INFORMATION

PRODUCT REFERENCE	DESCRIPTION
SW122 4341	CAT.8 STP field termination plug, blue latch

CAT.8 STP field termination plug.

Manufactured by Elsewedy Telecom Cables A.R.E., 10th of Ramadan City, Industrial Zone (A3), Egypt.

FIELD TERMINATION PLUG · FEILD TERMINATION PLUG · CAT8 MPTL

SPECIFICATIONS

Mating Cycles	750 Mating Cycles with FCC Compliant RJ45	Cable OD range	5.5-9.0mm
Insertion force	Max. 30N	Operating temperature range	-10°C to 60°C
Retention Strength	7.7kg between jack and plug	Extractor Material	PC, UL 94-V2, blue colour
IDC re-installing cycles	≥ 20 cycles	Housing & Cover	Zinc die-Casting with nickel plated
Wire conductor range	Solid and stranded, 23-26AWG	RJ45 Housing	PC, UL 94-V2, black colour

STANDARD COMPLIANCE

ANSI/TIA-568.2-D	ISO/IEC 11801-1, Class D/E
IEC 60603-7	IEC 60512-99-002
IEEE 802.3bt Type 4 PoE++ (4PPoE) 100W	ANSI/TIA-1096-A (FCC Part 68)
UL1863	RoHS/ REACH

SPECIFICATIONS · SOURCE NOTES

#

Mating Cycles | 750 Mating Cycles with FCC Compliant RJ45

Insertion force | Max. 30N

Retention Strength | 7.7kg between jack and plug

IDC re-installing cycles | ≥ 20 cycles

Wire conductor range | Solid and stranded, 23-26AWG

Cable OD range | 5.5-9.0mm

Operating temperature range | -10°C to 60°C

Extractor Material | PC, UL 94-V2, blue colour



Housing & Cover | Zinc die-Casting with nickel plated

RJ45 Housing | PC, UL 94-V2, black colour

PCB | FR4, UL 94-V0

TECHNICAL DRAWING

Unit of length: mm

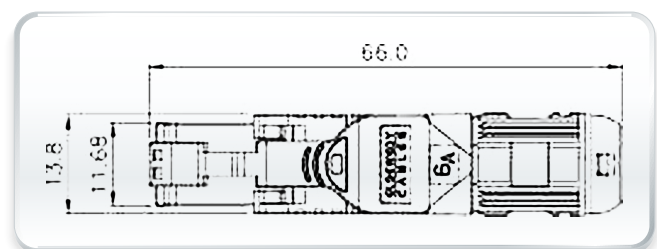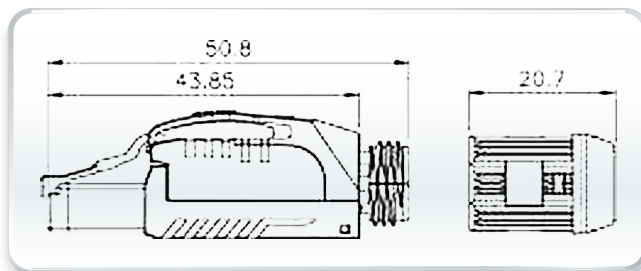

TECHNICAL DRAWING

