


IU 50 PORT VOICE PANEL

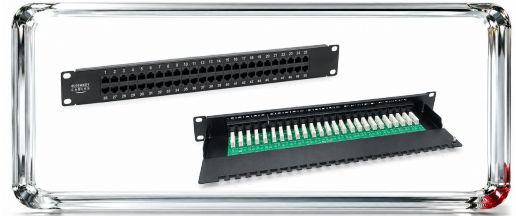

BRIEF

19-inch patch panel provides 50 ports and includes a support bar for added stability. Its design allows for flexible installation, and the snap-In identification plates enable quick and clear port labelling.

FEATURES

For use with multi-pair voice cables

Smooth sliding mechanism that significantly improves the ease of installation

SPECIFICATIONS

Operating temperature range

-10°C to 60°C

Humidity

10%~90%

Storage temperature range

-40°C to 70°C

Panel Material

SPCC 1.2mm black color painted


SPECIFICATIONS · SOURCE NOTES

10°C to 60°C -
temperature range e | 0°C to 0°C - 4 7 ~90% 10 %
anel M P | mm black color painted PCC S 1.2


COPPER CONNECTIVITY · PATCH PANELS · LOADED PANELS · CAT

TECHNICAL DRAWING

Unit of length: mm

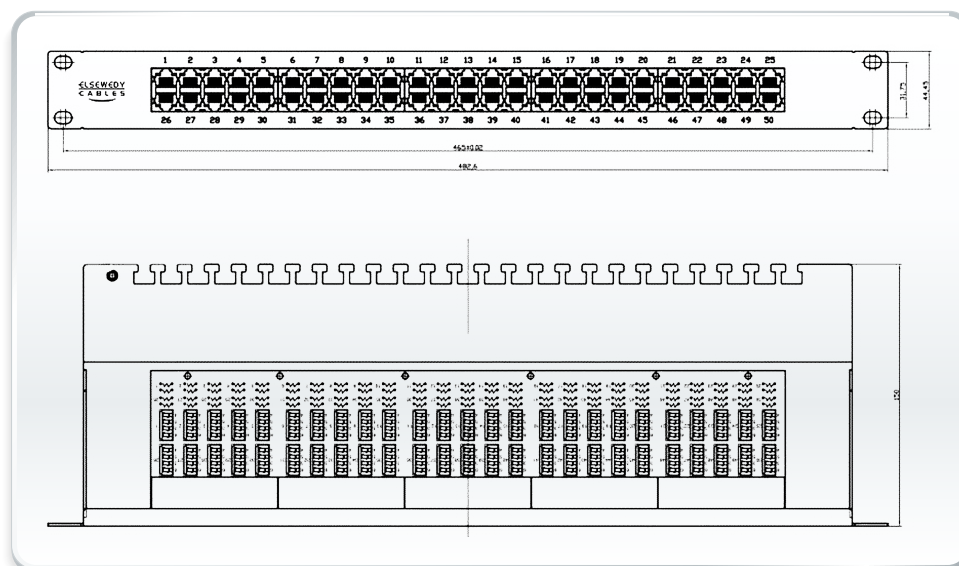

DESIGN

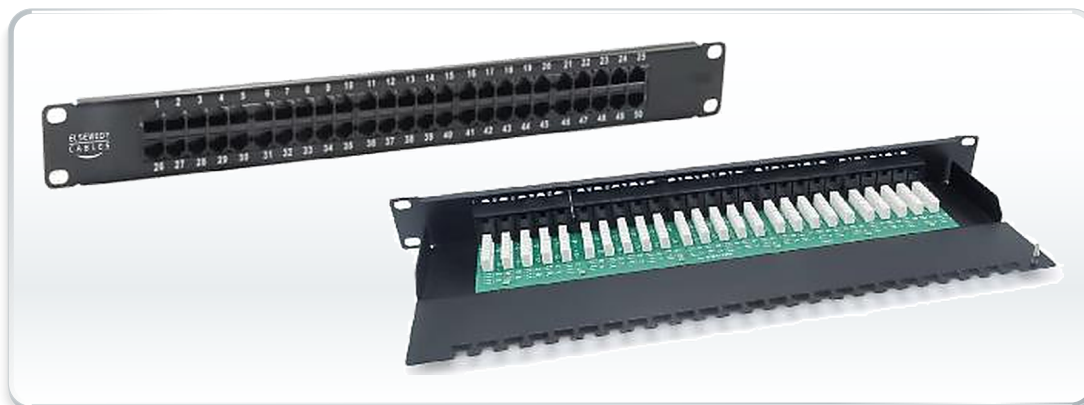

ORDERING INFORMATION

PRODUCT REFERENCE

DESCRIPTION

SW124 0121

IU 50 port voice panel, 90 degree with support bar, krone type

IU 50 port voice panel.

Manufactured by Elsewedy Telecom Cables A.R.E., 10th of Ramadan City, Industrial Zone (A3), Egypt.